




## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>7</sup> : B29C 65/16 // B29L 9:00, 31:30	A1	(11) International Publication Number: WO 00/66346 (43) International Publication Date: 9 November 2000 (09.11.00)
<p>(21) International Application Number: PCT/CA00/00459</p> <p>(22) International Filing Date: 28 April 2000 (28.04.00)</p> <p>(30) Priority Data: 60/131,844 30 April 1999 (30.04.99) US</p> <p>(71) Applicant (for all designated States except US): POWER-LASERS LIMITED [CA/CA]; Advanced Technology Centre, 543 Mill Street, Units 2 &amp; 3, Kitchener, Ontario N2G 2Y5 (CA).</p> <p>(72) Inventors; and (75) Inventors/Applicants (for US only): PINHO, George [CA/CA]; 163 Dalecroft Place, Waterloo, Ontario N2T 2T1 (CA). OGMEN, Melih [CA/CA]; R.R. #1, Ariss, Ontario N0B 1B0 (CA).</p> <p>(74) Agents: ORANGE, John, R., S. et al.; Orange &amp; Chari, Suite 4900, P.O. Box 190, 66 Wellington Street West, Toronto Dominion Bank Tower, Toronto-Dominion Centre, Toronto, Ontario M5K 1H6 (CA).</p>	<p>(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).</p> <p>Published With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</p>	

(54) Title: WELDING OF CARPET TO PANELS

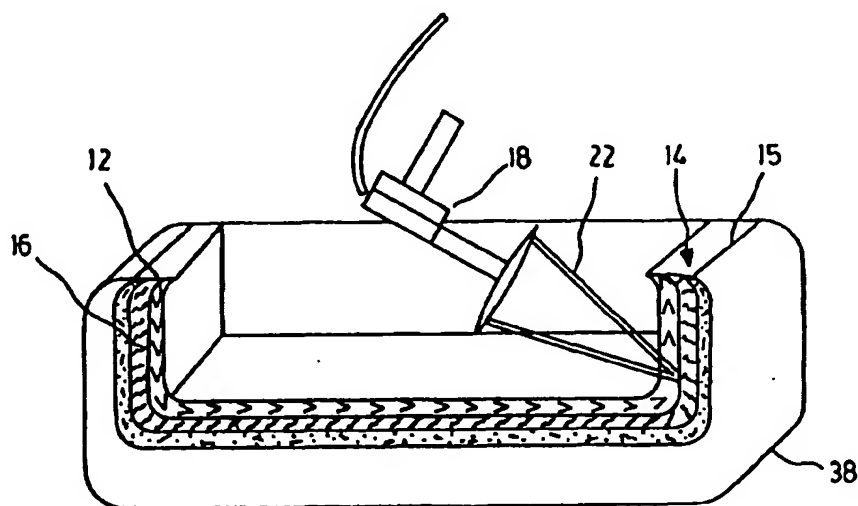

## (57) Abstract

A system and method for using a laser (18) to weld a plastic substrate material (12) to an adjacent material (14), such as a synthetic carpet panel. The materials are placed in contact with oppositely directed major surfaces, so as to provide an interface therebetween. The material closest to the laser (18) is transparent to a wavelength of the laser beam, so that the impinging laser beam can be focused at a focal region on the interface. The other material adjacent to the interface is absorbent to the wavelength, so that heating of the other material by the laser beam causes a pattern of a plurality of melt zones to be formed, each melt zone consisting of portions of each of the materials. Subsequent cooling of the melt zones causes the adjacent materials to become welded together. Additives are combined with the materials to modify their transmission and absorption characteristics with respect to visible light and laser wavelengths.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

## WELDING OF CARPET PANELS

### FIELD OF INVENTION

This invention relates to a method and apparatus for manufacturing laminated panels  
5 such as but not limited to door panels, kick panels, instrument panels, rear decks, seat backs,  
and consoles for the automotive industry.

### BACKGROUND OF THE INVENTION

A laminated panel such as a carpeted panel typically consists of a thermoplastic  
substrate, normally made of ABS, Nylon, PE, or PP plastic, onto which is bonded a synthetic  
10 fiber carpet with a thermoplastic backing. The carpet is mated to the plastic substrate and  
must fit properly so that no excessive gaps or spaces are present between the substrate and the  
carpet.

Various means of attaching such carpet material already exist, for instance,  
mechanical stapling of the carpet to the substrate, the use of adhesives, and other mechanical  
15 fasteners. These methods are often time consuming, visually unappealing, and generally  
result in the failure of the fasteners or adhesives over time.

Another method of fastening uses ultrasonic or vibration welding to attach the carpet  
to the substrate. Various problems exist with these methods. Ultrasonic welding tends to  
leave visual weld marks where the horn of the welder has made contact with the surface and  
20 is only suitable for spot welding. Vibration welding is limited to mostly flat surfaces, or  
simple three-dimensional parts with rigid backings, and requires complex securing  
mechanisms in order to vibrate the parts together.

It is therefore an object of the present invention to provide the method and materials  
that obviate or mitigate the above disadvantages.

25

### SUMMARY OF THE INVENTION

According to one aspect, the invention comprises a system for laminating a pair of  
panels having dissimilar optical characteristics such that one of the panels is transparent to  
laser radiation at a predetermined wavelength and another is substantially absorbent thereto.  
30 The system includes a support to locate the panels with oppositely directed major surfaces in  
abutment to provide an interface between the panels and a laser to provide a beam of coherent  
radiation at the predetermined wavelength. The laser is focused at the interface to produce a  
melt zone. The laser is displaceable relative to the support to cause the beam to impinge the

one panel and be transmitted therethrough to produce a plurality of melt zones formed at said interface. Each of the melt zones consist of a portion of each of the panels at the interface, whereby upon cooling the panels become welded to one another.

- According to a further aspect of the invention there is provided a method of
- 5 laminating a pair of panels of differing optical characteristics with one of the panels being transparent to a predetermined wavelength and a second panel being substantially absorbent thereto, comprising the steps of:
- (a) positioning oppositely directed major surfaces of the panels in contact to provide an interface therebetween;
  - 10 (b) transmitting the laser beam of predetermined wavelength through the one panel to the interface;
  - (c) focusing the laser beam at a focal region on the interface;
  - (d) applying the laser to heat and melt a portion of the second panel at the interface;
  - (e) displacing the laser beam relative to the panels to melt a plurality of portions of the
  - 15 panels adjacent to the focal region to produce a corresponding plurality of melt zones formed at the interface, each of the melt zones consisting of a mixture of the portions of the panels; and
  - (f) cooling of the melt zone so that the panels become welded at the interface.

In one embodiment, the present invention involves the use of a laser to weld a plastic

20 substrate to a carpet primarily for carpeted vehicle interior panels. The carpet is normally mounted on a flexible or rigid backing and positioned on a plastic substrate, which can be of a planar or three-dimensional shape. The welding apparatus includes a robot-controlled laser focussed onto the interface between the substrate and the carpet, normally from the substrate side but the laser may also be positioned on the carpet side. The radiation from the laser is

25 absorbed by the plastic and causes the interface to melt, and when the materials are compatible a weld occurs.

Preferably a continuous wave fiber-coupled diode laser is utilized. Pigments and dyes, either absorbent or transparent to the laser, are used in the plastic material to control the degree and location of localized heating. Certain combinations of individual pigments or

30 dyes may be used to obtain solid colors in the visible spectrum, such as black, which are transparent to the wavelength of the laser. Impact modifiers can also be added to the plastic to generate localized heating and alter the physical characteristics of the plastic material.

Whilst some heat damage may occur on the back of the substrate where the laser beam was focussed, the substrate is not usually visible in the final product. This welding

process also minimizes visible heat damage to the carpet fibers. The laser can weld the carpet by spot, stitch, or continuous welding patterns. Complex three-dimensional surfaces can be followed and welded easily by the robot.

## BRIEF DESCRIPTION OF THE DRAWINGS

5           Embodiments of the invention will now be described by way of example only with reference to the accompanying drawings, in which

Figure 1 is a cross sectional view of a carpet laser welding assembly.

Figure 2 illustrates a number of possible welding patterns.

10           Figure 3 is an alternative embodiment of the apparatus for welding of carpets with absorbent fibers.

Figure 4 shows the welding of a carpet to a three-dimensional surface.

Figure 5 shows transparency characteristics of dye and pigments.

## DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Referring to Figure 1, a laminated trim-piece (10) is formed from a pair of panels including a thermoplastic substrate (12), and a carpet overlay (14). The carpet (14) includes a pile (15) secured to a thermoplastic backing (16). The panels of the trim-piece (10) are held in a cradle (17) during assembly with oppositely directed surfaces, in intimate contact to define an interface 24.

20           The material of the panels are selected to exhibit different optical properties so that the substrate (12) is chosen to be transparent to the wavelength of the laser (22) and the backing (16) absorbent.

A robot (not shown) positions a laser welding head (18) on the substrate (12) side, so that a laser beam (22) is focused as indicated at (20) at an interface (24) between the substrate (12) and the carpet backing (16). The type of laser beam (22) used in this approach is a continuous wave diode laser operating at 808 nm or 940 nm, however an Nd:YAG or a CO<sub>2</sub> laser spanning the wavelength range 500 nm to 10600 nm can also be used.

25           When the laser beam (22) impinges on the substrate (12), it is transmitted to the interface (24). Absorption of the laser radiation by the backing (16) at the focal region (20) causes heating at the interface (24), which melts the substrate (12) and the backing (16). Upon cooling, the substrate (12) and the backing (16) become welded at the interface (24).

30           Several styles of welding patterns can be applied to secure the carpet backing (16) to the substrate (12), some examples of which are shown in Figure 2. The patterns of spot (26), stitch (28), or continuous welding (30) were used in initial testing, wherein the spacing (34)

between the individual weld locations (32) was limited to 2.5 cm. The width of the welds (32) used are preferably one millimeter, but can be made larger by increasing the laser power and defocusing the beam (22). Typical welding times can range from 20 seconds to 45 seconds, depending upon the surface area of the substrate (12) and backing (16), and the number of welds (32) required. The required power of the laser beam (22) varied between 50 and 100 W with transverse speeds ranging from 1 to 3 m/min. If desired, shorter welding times and faster speeds may be obtained with higher intensity laser beams (22).

The carpet pile (15) and backing (16) will typically be made from a polymeric material, usually a thermoplastic. Uncolored polymers are nearly 100% transparent to diode and Nd:YAG laser radiation. To enhance heating at the interface, the carpet backing (16) can include a pigment, such as carbon black that is absorbent at the wavelength of the laser beam (22). This pigmentation therefore increases the absorption of the laser radiation of the carpet backing (16). When the laser beam (22) strikes the interface (24), the transparent substrate (12) does not absorb the laser radiation but the carpet backing (16), with the imbedded pigment, absorbs the laser radiation and melts. This in turn causes the localised melting of the substrate (12) and the bonding of the substrate (12) and carpet backing (16) together. Since relatively little absorption occurs in the substrate (12), as compared to the carpet backing (16), visible damage is minimized on the substrate (12) or the carpet fibers (14).

Weldable pairings of materials investigated include; polyethylene - polyethylene, polyethylene - polypropylene, polypropylene - polypropylene, rubber - rubber, rubber - UHMW polyethylene, and UHMW - UHMW. The use of polyethylene and polypropylene materials in the manufacture of carpet panels (10) is made possible through laser welding, as these materials typically cannot be glued together. The use of polyethylene and polypropylene materials in carpet panels (10) also represents significant cost savings over the typical use of ABS and nylon materials, which are glueable but more expensive.

In a further embodiment, impact modifier examples can be added to the substrate (12) or carpet backing (16). The presence of these modifiers attenuates the laser beam (22) striking the plastic material and therefore causes local heating to occur, which welds the substrate (12) and adjacent backing (16) together.

An alternative embodiment, shown in Figure 3, is to choose the fibers of pile (15) and backing (16) from material such as polypropylene, and color them with pigment or dyes transparent to the laser radiation. The substrate (12) can then be colored with an absorbent pigment such as carbon black and the carpet backing (16) is welded to the substrate (12) from the carpet side. Absorption of radiation only occurs at the surface of the substrate (12),

thereby bonding the substrate (12) and the backing (16) together. This process can minimize potential damage to the carpet fibers (14).

Many applications in the automotive industry, require a black carpet which is typically absorbent to laser radiation. To obviate this, the materials of the carpet may be coloured with a pigment or dye which is substantially absorbtive i.e. black, in the visible spectrum but which is transparent to the radiation of the laser beam (22). This may be obtained by mixing pigments or dyes of the primary colors red, yellow and blue exhibiting transparency to the wavelength of the laser beam (22). Suitable pigments that have been used to provide a visible black colour that is optically transparent at laser wavelengths are available from Ciba Geigy as follows; blue - iragalite gbp, yellow - cromophtol 8gn, and red - iragalite 2bp. Each exhibit the individual spectral characteristics shown in Figure 5. When mixed in the proportion of 1:1:0.5 (blue-yellow-red) a black color is obtained in the visible spectrum but high transmission is retained at the wavelength of the laser beam (22). Alternative pigments are; red - iragalite rubine 4bp, blue - cromophtol a3r, and yellow - iragalite wgp.

Generally, pigments of primary colours exhibiting high transmission to laser wavelength but low transmission to the required visible wavelength may be mixed to obtain the requisite attributes and added to the polymer of the carpet fibers (14). The optical characteristics, shown in Figure 5, illustrate a distinct absorptive region (40) and transmissive region (42), located in the infrared spectrum.

A further embodiment, shown in Figure 3, demonstrates how the fibers of pile (15), potentially radiation absorbent, could be separated mechanically by a shoe (36), which reveals the carpet backing (16) and allows the laser beam (22) to weld the substrate (12) and the carpet backing (16) together. The shoe (36) moves with the laser head (18) to progressively expose the backing (16). When the welding process is completed, the carpet fibers (14) are released to move back into a natural position. This process could be used when carpet fibers (14) are generally absorbent to the laser beam (22) and the back of the substrate (12) is not accessible.

In another embodiment, the process of laser welding with a robot can also be applied to a complex three-dimensional part (38), shown in Figure 4. Since laser welding is a non-contact process, shapes of parts are easily welded by the laser which are difficult to weld by vibration. The substrate (12) is preferably made from polypropylene or polyethylene material. The carpet backing (16) is preferably made from polypropylene or polyethylene, while the carpet fibers of pile (15) are made from nylon or polypropylene. Other materials

may be used as appropriate. The laser power required for this operation typically varies between 50 watts to 100 watts for the desired material thicknesses, ranging between 0.3 cm and 1.3 cm respectively. The focal length of the lens used in the laser (18) is 2 inches, but different focal lengths may be used depending upon material properties or geometry. The  
5 laser head (18) is manipulated by a robot to follow closely the contours of the part (38) and maintain the focus of the laser at the interface between the backing (16) and substrate (12).

The welding pattern (26), (28), (30) can be other than shown, the weld (32) spacing other than one inch, the weld thickness other than 1 mm, and the welding times other than indicated. The type of laser used in welding can be other than diode laser and Nd:YAG. Any  
10 complex shape or shapes can be used, where the geometry is only limited by access of the laser beam (22).

Although the invention has been described with reference to certain specific embodiments, various modifications thereof will be apparent to those skilled in the art without departing from the spirit and scope of the invention as outlined in the claims  
15 appended hereto.



**THE EMBODIMENTS OF THE INVENTION IN WHICH AN EXCLUSIVE  
PROPERTY OR PRIVILEGE IS CLAIMED ARE DEFINED AS FOLLOWS:**


1. A system for laminating a pair of panels having dissimilar optical characteristics such  
5 that one of said panels is transparent to laser radiation at a predetermined wavelength  
and a second of said panels is substantially absorbent thereto, said system comprising:  
a support to locate said panels with oppositely directed major surfaces in abutment to  
provide an interface between said panels; and a laser to provide a beam of coherent  
radiation at said predetermined wavelength, said laser being focussed at said interface  
10 to produce a melt zone, said laser being displaceable relative to said support to cause  
said beam to impinge said one panel and be transmitted therethrough to produce a  
plurality of melt zones formed at said interface; each of said melt zones consisting of  
a portion of each of said panels at said interface, whereby upon cooling said panels  
become welded to one another.  
15
2. A system for welding according to claim 1, wherein said second panel includes an  
additive for enhancing absorption characteristics of said beam at said predetermined  
wavelength.
- 20 3. A system for welding according to claim 2, wherein said additive is selected from the  
group comprising pigments and dyes.
4. A system for welding according to claim 3, wherein said additive is carbon black.
- 25 5. A system for welding according to claim 2, wherein said additive is an impact  
modifier.
6. A system for welding according to claim 1, wherein said one panel includes an  
additive which is substantially absorbent to visible spectrum radiation and  
30 substantially transparent to radiation of said laser beam.
7. A system for welding according to claim 6, wherein said additive is selected from the  
group comprising pigments and dyes.

8. A system for welding according to claim 7, wherein said additive is a mixture of primary colors.
- 5 9. A system for welding according to claims 1 to 8, wherein said panels comprise polymers selected from the group comprising polyethylene, polypropylene, rubber, and UHMW.
- 10 10. A system for welding according to claims 1 and 9, wherein said predetermined wavelength is in the range 500nm to 10,600nm.
11. A system for welding according to claim 10, wherein said laser is a Nd:YAG laser.
12. A system for welding according to claim 10, wherein said laser is a diode laser.
- 15 13. A system for welding according to claim 1, wherein a pattern of said plurality of melt zones is selected from the group comprising spot, stitch, and continuous welds.
14. A system for welding according to claim 1, wherein said one panel includes a plurality of fibers providing a carpet pile and secured to a backing, said pile being  
20 located on an exterior surface of said backing spaced apart from said interface.
15. A system for welding according to claim 14 further comprising a separator for spreading laser radiation absorbent ones of said carpet fibers to expose a portion of said exterior surface of said backing, whereby said laser beam impinges upon said  
25 interface.
16. A system for welding according to claim 14, wherein said fibers are substantially transparent to said wavelength of said laser beam.
- 30 17. A method of laminating a pair of panels of differing optical characteristics with one of said panels being transparent to coherent radiation at a predetermined wavelength and a second of said panels being substantially absorbent to said predetermined wavelength, the method comprising the steps of:

- (a) positioning oppositely directed major surfaces of said panels in contact to provide an interface therebetween;
  - (b) transmitting a laser beam of predetermined wavelength by a laser through said one panel to said interface;
  - 5 (c) focusing said laser beam at a focal region on said interface;
  - (d) applying said laser beam to heat and melt a portion of said second panel at said interface;
  - (e) displacing said laser beam relative to said panels to melt a plurality of portions of said panels adjacent to said focal region to produce a corresponding plurality of melt zones  
10 formed at said interface, each of said melt zones consisting of a mixture of said portions of said panels; and
  - (f) cooling of said melt zone so that said panels become welded at said interface.
18. A method according to claim 17, wherein a pattern of said plurality of melt zones is  
15 selected from the group comprising spot, stitch, and continuous welds.
19. A method according to claim 17 further including the step of moderating an intensity  
20 of said laser beam so that heat damage to a visible surface of at least one of said panels is minimized.
20. A method according to claim 17, wherein said interface is a three dimensional surface  
25 and said laser is adjusted to maintain said focal region at said interface.
21. A method according to claim 17 further comprising the steps of incorporating  
30 additives to at least one of said panels for modifying transmission characteristics of said panel with respect to said predetermined wavelength of said laser beam.
22. A method according to claim 21 including the step of incorporating a pigment or dye  
in said second panel to enhance the absorption thereof at said predetermined  
wavelength.

23. A method according to claim 21 including the step of mixing primary colours for incorporation in said one panel to provide substantial absorption in the visible spectrum and transparency at said predetermined wavelength.
- 5
24. A method according to claim 22 wherein said one panel includes a plurality of fibres to form a carpet pile and a backing to secure said pile, said backing being transparent to said predetermined wavelength.
- 10
25. A method according to claim 24 wherein said fibres are absorptive to said predetermined wavelength and said method includes the step of separating said fibres to permit said beam to impinge upon said backing and be transmitted therethrough to said interface.
- 15
26. A method according to claim 24 wherein including the step of mixing primary colours and incorporating such mixture in said fibres to provide substantial absorption in said visible wavelength and transmission at said predetermined wavelength.
- 20
27. A method according to claim 26 including the step of a mixing said primary colours to be transmissive in the infrared range.
- 25
28. A panel for securing to a substrate to provide a finished component, said panel comprising a plurality of fibres to provide a carpet pile and a backing to secure said pile, said backing being transparent to a laser beam of a predetermined wavelength and said fibres having an additive to render them transparent to said predetermined wavelength and substantially absorptive of light in the visible spectrum.
- 30
29. A panel according to claim 28 wherein said additive is provided by a mixture of dyes or pigments.
- 30
30. A panel according to claim 29 wherein said additive is a mixture of primary colours.
31. A panel according to claim 30 wherein said mixture is transmissive in the infrared spectrum.

1/5

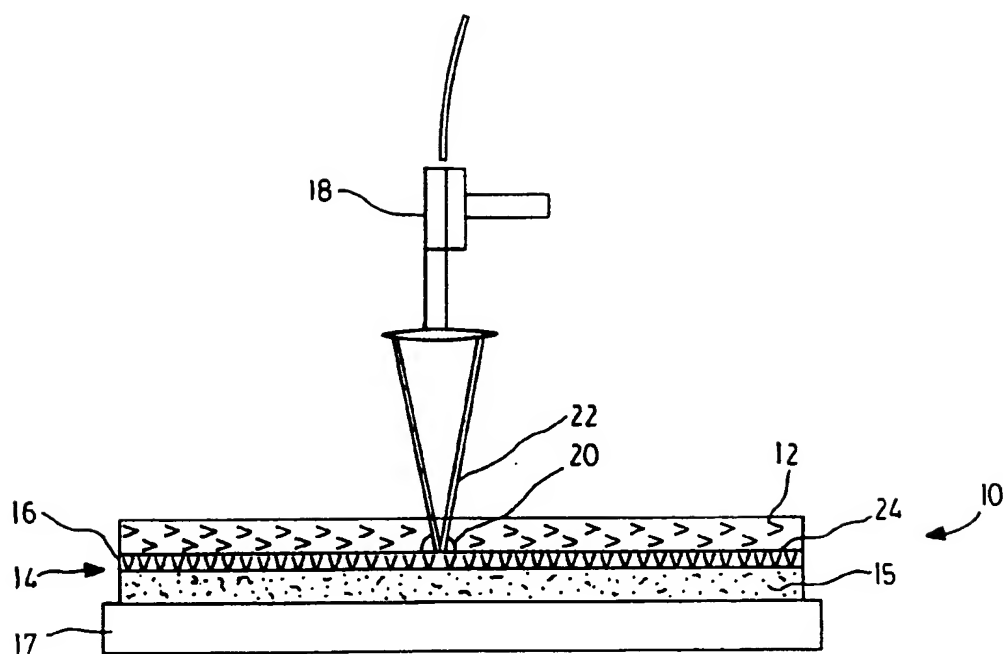FIG. 1

2/5

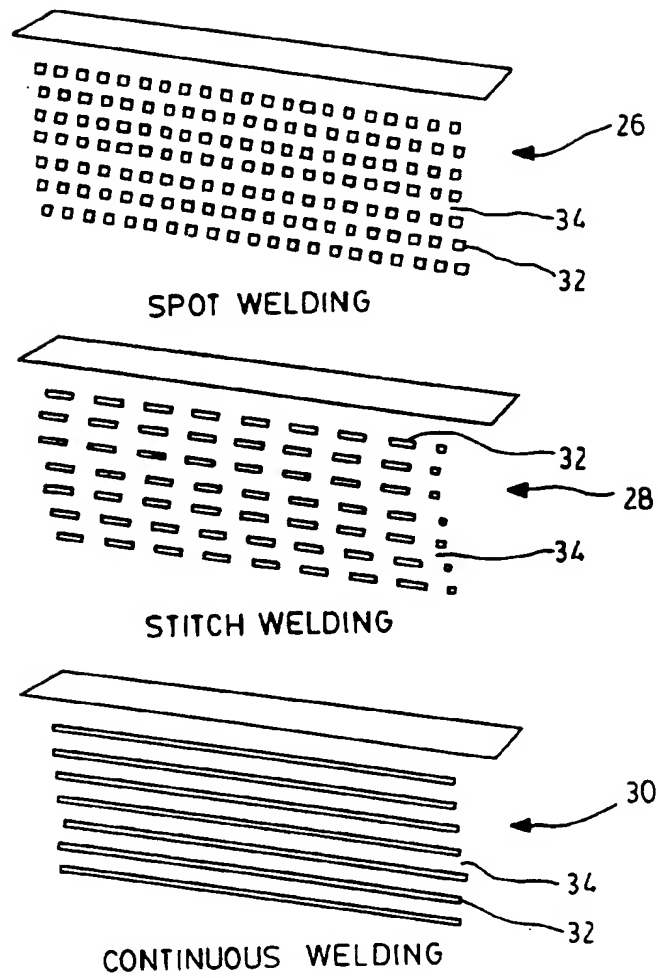
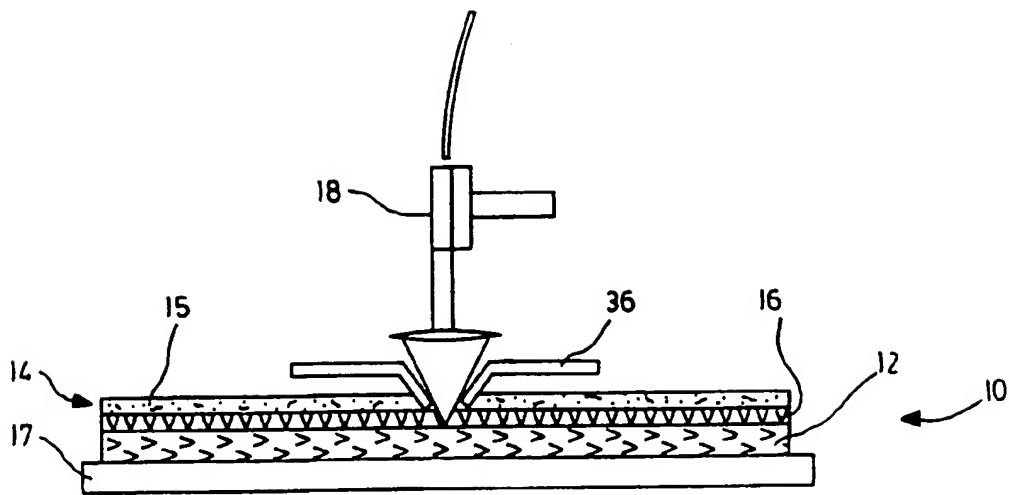
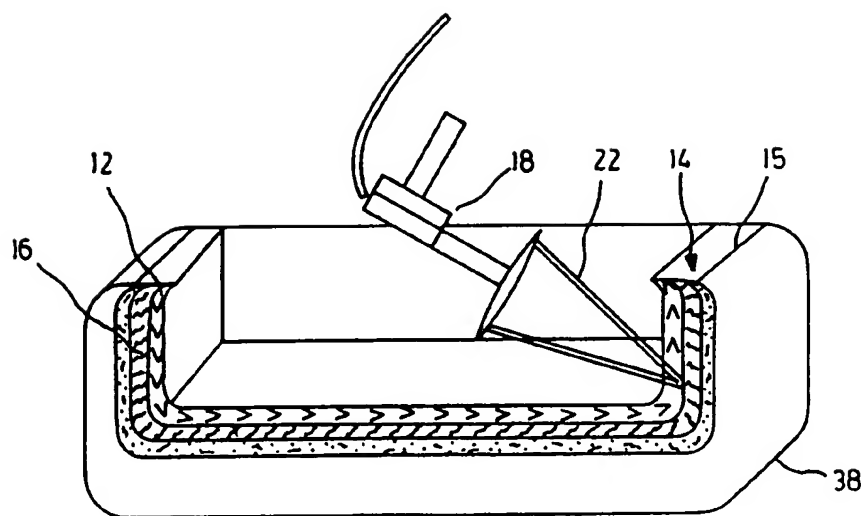


FIG. 2

3/5

FIG. 3

4/5

FIG. 4



Primary Color Spectrum (ryb1spect)

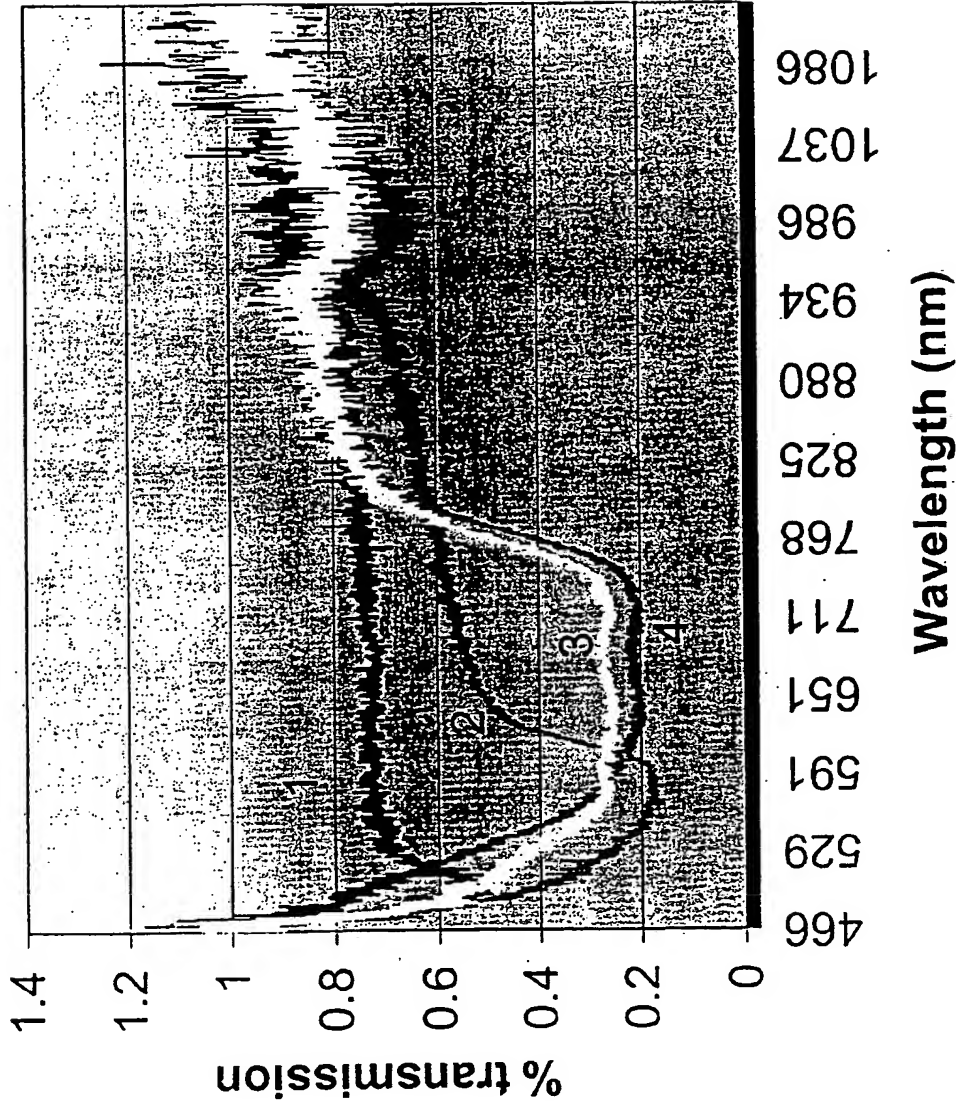


Fig. 5

# INTERNATIONAL SEARCH REPORT

Int .tional Application No

PCT/CA 00/00459

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 B29C65/16 //B29L9:00.B29L31:30

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 B29C B32B B23K

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data. PAJ

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	EP 0 163 269 A (DU PONT) 4 December 1985 (1985-12-04)  the whole document	1-14, 16-19, 21-24, 26,27
Y	DE 43 12 555 A (KOPP REINER PROF DR ING) 20 October 1994 (1994-10-20)	1-14, 16-19, 21-24, 26,27
A	column 2, line 31 - line 36 column 3, line 6 - line 12; claims 12,13	28
A	FR 1 577 304 A (HELLER) 8 August 1969 (1969-08-08) page 5, right-hand column, line 35 - line 58 page 6, left-hand column, line 13  -/--	2-5



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

### \* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"Z" document member of the same patent family

Date of the actual completion of the international search

13 October 2000

Date of mailing of the international search report

20/10/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl.  
Fax: (+31-70) 340-3016

Authorized officer

Cordenier. J

# INTERNATIONAL SEARCH REPORT

Int .tional Application No

PCT/CA 00/00459

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	DE 14 79 239 A (FARBWERKE HOECHST AG, VORM. MEISTER LUCIUS & BRÜNING) 4 June 1969 (1969-06-04) page 3, paragraph 3; claim 6 ---	2-5
A	PUETZ H ET AL: "LASER WELDING OFFERS ARRAY OF ASSEMBLY ADVANTAGES" MODERN PLASTICS INTERNATIONAL, CH. MCGRAW-HILL, INC. LAUSANNE, vol. 27, no. 9, 1 September 1997 (1997-09-01), pages 127-128, 130, XP000699142 ISSN: 0026-8283 the whole document ---	2-8, 16, 21-24
A	DE 195 10 493 A (MARQUARDT) 5 October 1995 (1995-10-05)  column 7, line 11 - line 66 ---	2-8, 16, 21-24, 26, 27
A	WO 97 42793 A (GOLDBERG DAVID A) 13 November 1997 (1997-11-13) page 13, line 10 - line 30; claims 1-4, 16, 19-21, 32, 33; figures 4, 5 ---	1, 10, 12, 17, 19
A	US 5 827 392 A (BUCKLEY DANIEL T ET AL) 27 October 1998 (1998-10-27) column 7, line 34 - line 45 column 10, line 38; figure 4 ---	1, 17
A	US 4 477 299 A (FRIEDRICH HANS-JOACHIM) 16 October 1984 (1984-10-16) abstract; figures ---	14, 28
A	DE 15 65 794 A (SIEMENS) 19 February 1970 (1970-02-19) claims ---	2-5
A	FR 1 436 130 A (SOCONY MOBIL OIL COMP.) 1 July 1966 (1966-07-01) claims 1, 2, 4 ---	5
A	US 4 473 432 A (LEADER HAROLD ET AL) 25 September 1984 (1984-09-25) figures 5, 13 ---	1, 17
P, A	WO 00 20157 A (JONES IAN ANTHONY ; WISE ROGER JEREMY (GB); WELDING INST (GB)) 13 April 2000 (2000-04-13) the whole document -----	2-4

# INTERNATIONAL SEARCH REPORT

Information on patent family members

Int. lional Application No

PCT/CA 00/00459

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0163269 A	04-12-1985	CA 1245540 A DE 3586509 A DE 3586509 T JP 1674185 C JP 3036658 B JP 60260321 A US 4664738 A	29-11-1988 24-09-1992 18-02-1993 26-06-1992 03-06-1991 23-12-1985 12-05-1987
DE 4312555 A	20-10-1994	NONE	
FR 1577304 A	08-08-1969	DE 1704116 A GB 1216516 A JP 52000065 B US 3574031 A	22-04-1971 23-12-1970 05-01-1977 06-04-1971
DE 1479239 A	04-06-1969	NONE	
DE 19510493 A	05-10-1995	AT 166026 T WO 9526869 A DE 59502175 D EP 0751865 A ES 2119415 T JP 9510930 T US 5893959 A	15-05-1998 12-10-1995 18-06-1998 08-01-1997 01-10-1998 04-11-1997 13-04-1999
WO 9742793 A	13-11-1997	AU 3118797 A EP 1004225 A	26-11-1997 31-05-2000
US 5827392 A	27-10-1998	US 5364258 A US 5217656 A US 5487853 A CA 2089826 A EP 0620091 A JP 2839812 B JP 6270143 A	15-11-1994 08-06-1993 30-01-1996 19-08-1994 19-10-1994 16-12-1998 27-09-1994
US 4477299 A	16-10-1984	DE 3113636 A AT 16205 T CA 1186980 A DE 3266975 D EP 0062741 A JP 1470074 C JP 57190804 A JP 63015405 B	21-10-1982 15-11-1985 14-05-1985 28-11-1985 20-10-1982 14-12-1988 24-11-1982 05-04-1988
DE 1565794 A	19-02-1970	NONE	
FR 1436130 A	01-07-1966	DE 1479686 A GB 1101762 A US 3560291 A	10-07-1969 02-02-1971
US 4473432 A	25-09-1984	NONE	
WO 0020157 A	13-04-2000	AU 6108199 A	26-04-2000